


## Valupääte Green Pin®

### Silmukkapääte G-6411

Materiaali: GS21Mn5, kuumasinkittynä tai maalattuna. Varmuuskerroin: 5.

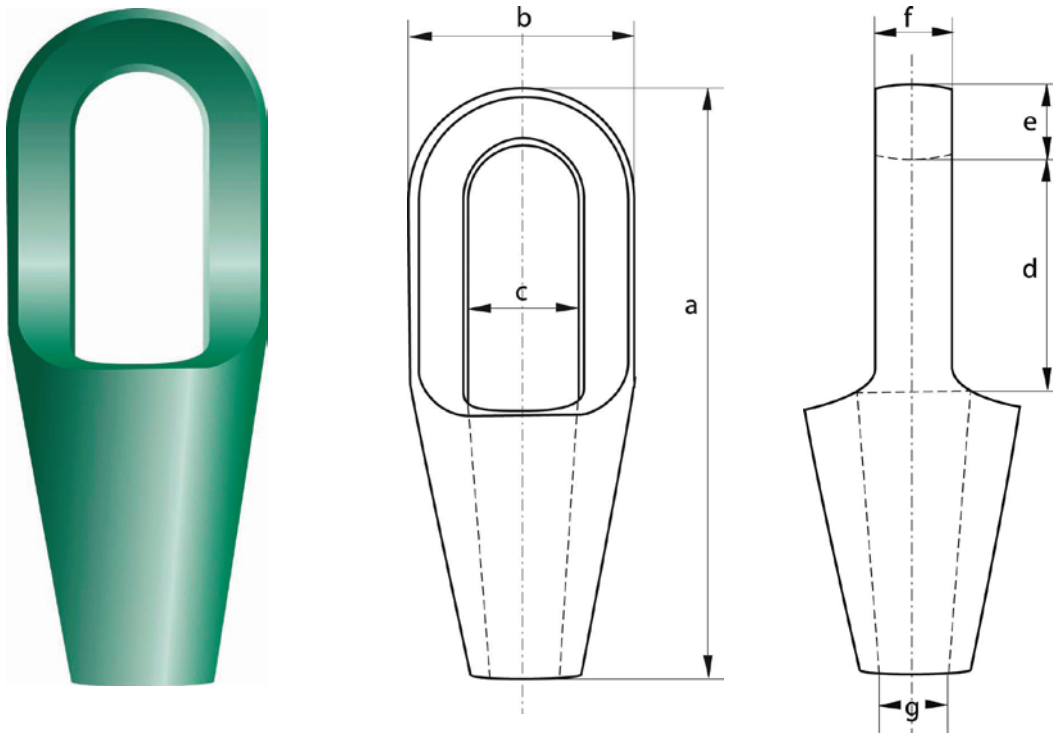

Numero	Murtolujuus t	Teräsköyden halkaisija mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	paino kg
296	8	6 - 7	101	37	22	40	11	13	9	3
297	12	8 - 10	119	43	25	48	14	175	12	5
298	20	11 - 13	140	52	30	58	18	235	15	75
299	25	14 - 16	162	68	37	66	21	26	175	15
200	40	18 - 19	194	76	42	78	27	32	215	21
201	55	20 - 22	224	92	47	90	33	38	24	36
204	75	23 - 26	253	104	57	103	36	44	28	58
207	90	27 - 30	282	114	63	116	39	51	32	7
212	125	31 - 36	312	127	70	130	43	57	38	105
215	150	37 - 39	358	136	79	155	51	63	41	13
217	170	40 - 42	390	146	83	171	54	70	44	17
219	225	43 - 48	443	171	93	198	55	76	51	26
222	280	49 - 54	502	193	100	224	62	82	57	375
224	360	55 - 60	548	216	112	247	73	92	63	50
226	425	61 - 68	597	241	140	270	79	102	73	65
227	460	69 - 75	644	273	159	286	79	124	79	94
228	560	76 - 80	686	292	171	298	83	133	86	115
229	625	81 - 86	743	311	184	311	102	146	92	145
230	720	87 - 93	788	330	197	330	102	159	99	168
231	875	94 - 102	845	362	216	356	108	178	108	210
233	1200	108 - 115	1000	405	235	425	125	190	125	330
240	1300	120 - 130	1150	450	260	525	125	200	143	500