


XLE – Varmuuskoukku pyörivällä silmukalla


Iso silmukka mahdollistaa koukun käyttämisen myös teräsköysiraksien kanssa. Kavennus silmukassa mahdollistaa myös omegaliittimen käytön.

Tyyppi	WLL t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	Paino kg
XLE-06	1,12	122	32	32	32	16	26	77	192	12	6	0,78
XLE-08	2	148	39	37	43	23	29	92	231	14	8	1,39
XLE-10	3,2	183	46	48	47	32	35	111	282	16	11	2,56
XLE-13	5,4	214	57	58	61	37	45	142	336	21	14	4,56
XLE-16	8,2	269	65	73	74	39	56	185	416	25	17	9,37
XLE-18/20	12,8	303	87	82	88	51	63	207	480	25	22	12,7

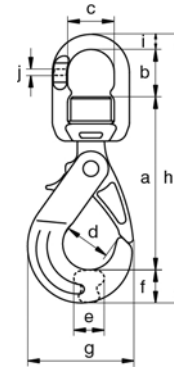

CRO – Silmukallinen lyhennyskoukku

Tyyppi	WLL t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	Paino kg
CRO-06	1,12	41	24	23	8	24	20	42	94	9	6	0,25
CRO-08	2	53	27	26	10	33	23	53	115	10	8	0,45
CRO-10	3,2	65	38	36	12	40	29	66	146	14	10	0,91
CRO-13	5,4	83	42	41	15	56	40	88	183	16	12	1,99
CRO-16	8,2	103	44	41	18	66	43	96	211	20	20	2,49
CRO-20	12,8	130	37	37	22	75	48	128	241	26	26	4,30
CRO-22	15,5	120	44	44	25	77	57	132	247	26	26	8,50
CRO-26	21,6	158	46	46	30	100	82	177	320	32	32	14,70
CRO-32	32,8	210	57	57	38	91	88	215	395	39	39	18,00

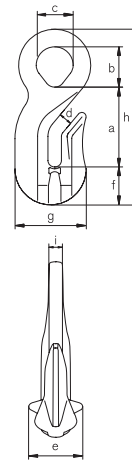

CRC – Lyhennyskoukku

Tyyppi	WLL t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	Paino kg
CRC-06	1,12	52	7	28	7	24	19	42	86	8	0,28
CRC-08	2	64	9	32	10	33	23	53	104	9	0,45
CRC-10	3,2	75	12	42	12	40	29	66	127	13	0,88
CRC-13	5,4	103	15	54	15	56	40	88	173	16	2,17
CRC-16	8,2	127	19	68	18	65	43	96	208	20	2,81

