



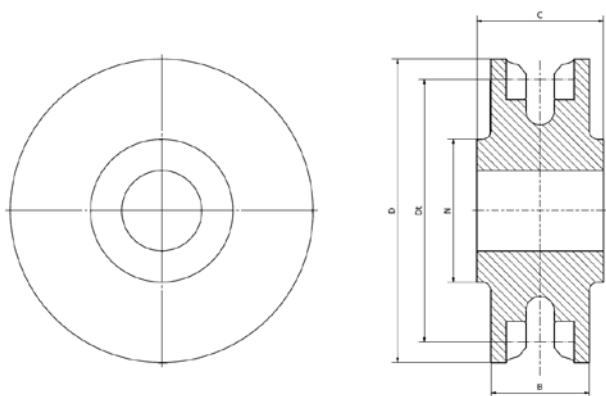

Kettingin ainevahvuus (mm)	Kettinkilenkin sisäpituus (mm)	Taskujen lukumäärä	Leveys B (mm)	Navan leveys C (mm)	Pyörän halkaisija D (mm)	Pyörän jakohalkaisija Dt (mm)	Navan halkaisija N (mm)	Paino (kg)
8	24	5	45	65	105	76	80	2,3
8	24	6	45	65	115	92	80	3,0
8	24	7	45	65	117	107	80	3,4
8	24	8	45	65	162	122	80	4,6
8	24	10	45	65	180	153	80	4,8
8	24	12	48	65	212	183	80	6,0
8	24	14	48	65	245	214	80	7,5
8	24	16	48	70	275	244	90	9,0
8	24	18	48	70	305	275	90	11,0
8	24	20	48	70	345	306	90	13,0
8	24	24	48	70	390	367	120	15,0
8	24	28	48	70	450	428	120	17,0
8	24	30	48	70	495	458	120	19,0
8	24	32	48	70	530	489	90	21,0
8	24	38	50	75	610	581	100	25,0
10	28	5	50	65	115	89	60	3,0
10	28	8	50	65	170	140	80	6,5
10	28	12	52	75	250	214	140	14,0
10	28	24	56	70	450	428	100	19,0

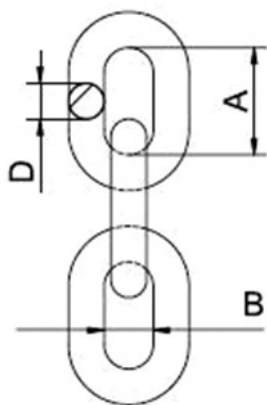

KETTINKI DIN 766					
Ainevahvuus D (mm)	Jako A (mm)	Sisäleveys min. B (mm)	WLL (kg)	Paino (kg/m)	Murtolujuus min. (kN)
5	18,5	6	320	0,5	12,5
6	18,5	7,2	400	0,8	16
8	24	9,6	800	1,4	32
10	28	12	1250	2,3	50