




G-6314

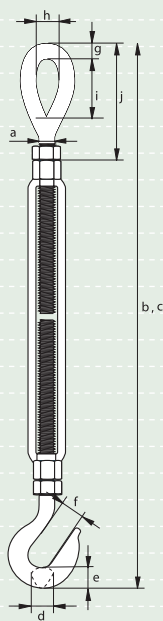

Green Pin® turnbuckles Eye - Hook generally to ASTM F1145-92

- **Material** : drop forged high tensile steel SAE 1035 or 1045
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish** : hot dipped galvanized
- **Certification** : a works certificate or proof load test certificate can be supplied upon request

working load limit	diameter thread	take up	length closed position	length open position	thickness hook	thickness hook	opening hook	diameter eye	inside width eye	inside length eye	length closed position	weight per pce
tons	a inches	inches	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	kg
0.45	$\frac{3}{8}$	6	302	416	10	15	14	9	13	28	65	0.47
0.68	$\frac{1}{2}$	6	338	452	13	19	17	12	18	36	80	0.82
0.68	$\frac{1}{2}$	9	414	585	13	19	17	12	18	36	80	1.06
0.68	$\frac{1}{2}$	12	490	719	13	19	17	12	18	36	80	1.28
1.02	$\frac{5}{8}$	6	394	508	16	23	22	14	21	43	98	1.31
1.02	$\frac{5}{8}$	9	470	641	16	23	22	14	21	43	98	1.56
1.02	$\frac{5}{8}$	12	546	775	16	23	22	14	21	43	98	1.71
1.36	$\frac{3}{4}$	6	432	546	20	27	25	17	25	53	113	2.04
1.36	$\frac{3}{4}$	9	508	679	20	27	25	17	25	53	113	4.49
1.36	$\frac{3}{4}$	12	584	813	20	27	25	17	25	53	113	2.3
1.36	$\frac{3}{4}$	18	737	1080	20	27	25	17	25	53	113	2.85
1.81	$\frac{7}{8}$	12	625	854	23	30	29	20	31	59	118	3.33
1.81	$\frac{7}{8}$	18	778	1121	23	30	29	20	31	59	118	4.24
2.27	1	6	524	638	25	35	32	22	36	74	155	3.87
2.27	1	12	676	905	25	35	32	22	36	74	155	5.09
2.27	1	18	829	1172	25	35	32	22	36	74	155	6
2.27	1	24	980	1437	25	35	32	22	36	74	155	7.52
2.95	1 $\frac{1}{4}$	12	760	989	28	37	39	29	45	88	197	8.12
2.95	1 $\frac{1}{4}$	18	912	1255	28	37	39	29	45	88	197	10.4
2.95	1 $\frac{1}{4}$	24	1064	1521	28	37	39	29	45	88	197	12.1
3.4	1 $\frac{1}{2}$	12	823	1052	33	44	47	32	54	105	215	12.7
3.4	1 $\frac{1}{2}$	18	975	1318	33	44	47	32	54	105	215	15.1
3.4	1 $\frac{1}{2}$	24	1128	1585	33	44	47	32	54	105	215	17.1