
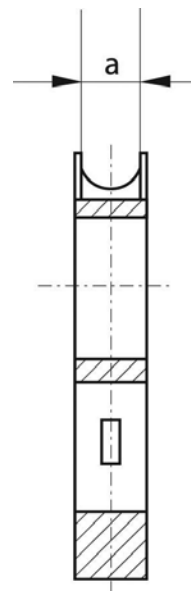


Koussi DIN3091

Materiaali: Valettu (GTW40). Käsittelemätön.
Reikä voidaan työstää (kts. taulukko)

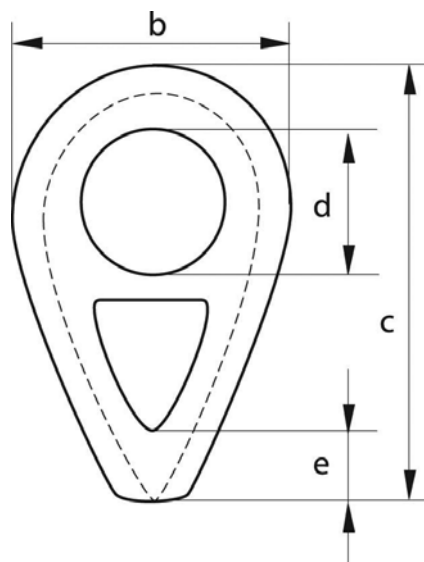

teräsköyden halkaisija mm	a mm	b mm	c mm	d mm	e mm	f mm	paino kg/100 kpl
8	9	15	40	66	14	-	14
10	11	17,5	50	82	18	-	21
12	13	20	60	98	21	-	39
14	16	23,5	70	114	25	-	73
16	18	26	80	130	28	16	83
18	20	28,5	90	145	31	18	113
20	22	31	100	161	35	20	148
22	24	33,5	110	177	38	22	193
24	26	36	120	193	41	24	254
26	29	39,5	130	209	44	26	355
28	31	42	140	224	47	28	387
32	35	47	160	256	53	32	437
36	40	53	180	288	59	36	870
40	44	58	200	320	65	40	1300
44	48	63	220	352	70	44	1700
48	53	69	240	384	76	48	2000
52	57	74	260	416	81	52	2500
56	62	80	280	448	86	56	3200
64	70	90	320	512	95	64	4600
72	79	101	360	576	104	72	6600
80	88	112	400	640	112	80	9000