
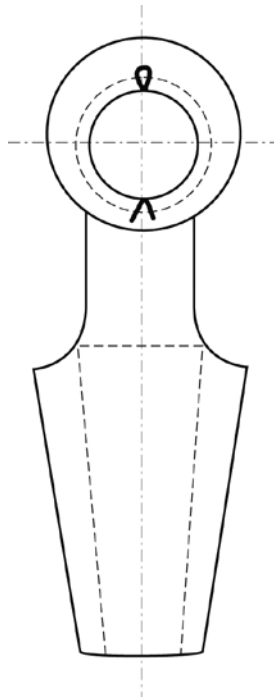


Valupääte Green Pin®

Haarukkapääte G-6412. Materiaali: GS21Mn5, kuumasinkittynä tai maalattuna. Varmuuskerroin: 5

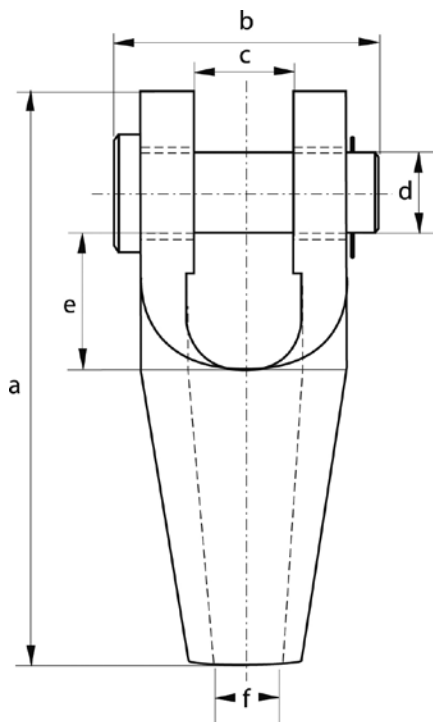

Numero	Murtolu- juus t	Teräsköyden halkaisija mm	a mm	b mm	c mm	d mm	e mm	f mm	paino kg
196	8	6 - 7	109	51	19	16	33	9	0,4
197	12	8 - 10	124	62	21	21	34	12	0,7
198	20	11 - 13	143	66	26	25	37	15	1
199	25	14 - 16	172	82	33	30	49	18	1,8
100	40	18 - 19	205	95	38	35	58	21	3
104	55	20 - 22	235	110	44	41	68	24	4,6
108	75	23 - 26	275	130	51	51	75	28	8
111	90	27 - 30	306	144	57	57	85	32	11
115	125	31 - 36	338	155	63	64	95	38	16
118	150	37 - 39	394	178	76	70	127	41	22
120	170	40 - 42	418	187	76	76	127	44	27
125	225	43 - 48	468	213	89	89	134	51	41
128	280	49 - 54	552	240	101	95	181	57	64
130	360	55 - 60	598	270	113	108	196	63	88
132	425	61 - 68	654	303	127	121	213	73	125
135	460	69 - 75	696	349	133	127	216	79	155
138	560	76 - 80	737	371	146	133	220	86	187
140	625	81 - 86	788	391	159	140	228	92	230
142	720	87 - 93	852	411	171	152	242	99	265
144	875	94 - 102	914	447	191	178	254	108	400
146	1200	108 - 115	1160	489	206	193	369	125	660
150	1300	120 - 130	1310	603	225	250	390	143	735