


G6413 Green Pin® kiilapesä

open wedge socket

- Standardi : EN 13411-6
- Kuumagalvanoitu
- Käyttölämpötila: -20°C – +200°C

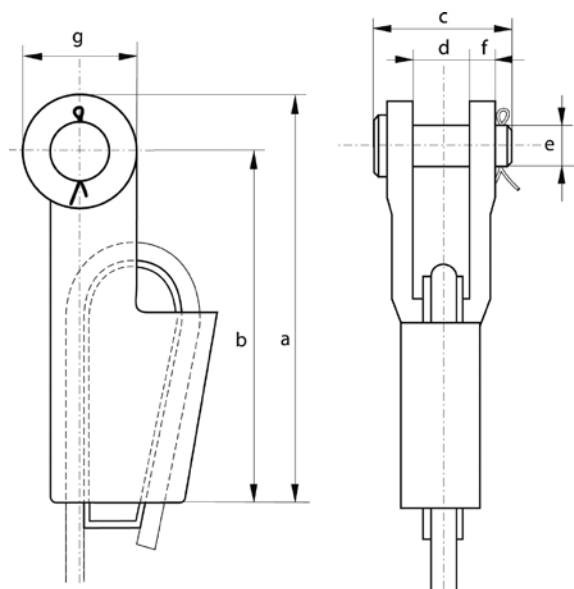

Numero	Minimi Murtokuorma t	Teräsköyden halkaisija mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	Paino kg
0,25	8	7 - 8	128	110	51	18	16	9	36	0,8
0,5	12	9 - 10	165	142	62	205	21	11	46	1,5
1	20	11 - 13	175	146	66	25	25	12	57	2,4
2	25	14 - 16	211	176	82	31	30	15	70	4
3	40	18 - 19	252	212	95	38	35	16	80	7,4
4	55	20 - 22	288	240	110	44	41	19	95	11
5	75	24 - 26	329	274	130	51	51	22	110	16
6	90	27 - 29	375	310	144	57	57	25	130	22
7	110	30 - 32	423	350	155	63	64	28	146	31
8	125	34 - 36	474	400	163	69	64	28	148	39
9	150	37 - 39	527	450	178	76	70	30	153	48
10	170	40 - 42	580	500	187	76	76	33	160	64
11	225	43 - 48	650	550	226	89	89	39	186	96
12	280	49 - 52	745	640	240	101	95	46	194	130
13	360	54 - 58	785	660	275	114	108	54	230	180
14	425	60 - 68	970	835	300	127	121	60	250	275
15	460	72 - 76	1150	1000	355	146	133	76	270	440
16	625	81 - 86	1252	1100	375	159	140	79	300	510