



Malli	Työalue (kg) Min. ~ Max.	Vaijerin pituus (m)	Vaijerin halkaisija (mm)	Korkeus (mm)	Paino (kg)
ELF-3	1,5 ~ 3,0	2,5	4	347	4,6
ELF-5	2,5 ~ 5,0	2,5	4	347	4,8
ELF-9	5,0 ~ 9,0	2,5	4	347	5,4
ELF-15	9,0 ~ 15,0	2,5	4,76	440	10,0
ELF-22	15,0 ~ 22,0	2,5	4,76	440	10,2
ELF-30	22,0 ~ 30,0	2,5	4,76	440	11,0
ELF-40	30,0 ~ 40,0	2,5	4,76	450	14,5
ELF-50	40,0 ~ 50,0	2,5	4,76	450	14,9
ELF-60	50,0 ~ 60,0	2,5	4,76	450	17,1
ELF-70	60,0 ~ 70,0	2,5	4,76	450	18,0

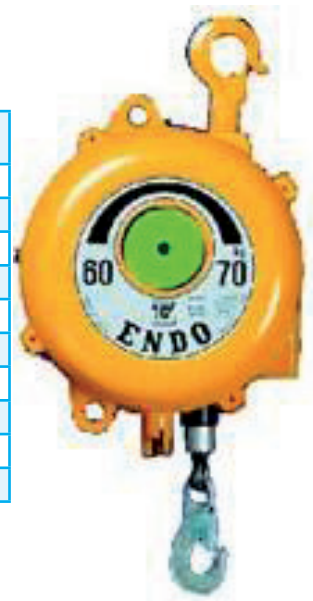

Malli	Työalue (kg) Min. ~ Max.	Vaijerin pituus (m)	Vaijerin halkaisija (mm)	Korkeus (mm)	Paino (kg)
EWA-22	15,0 ~ 22,0	1,3	4,76	428	7,2
EWA-30	22,0 ~ 30,0	1,3	4,76	428	7,6
EWA-40	30,0 ~ 40,0	1,3	4,76	428	9,8
EWA-50	40,0 ~ 50,0	1,3	4,76	428	10,4

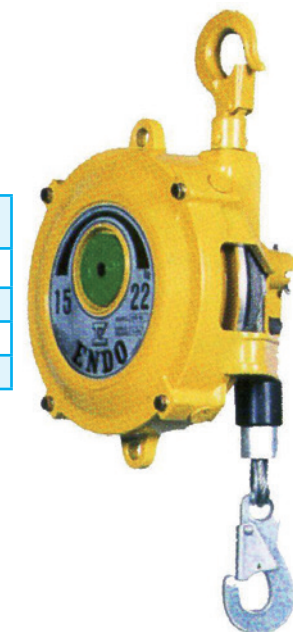

Malli	Max. jousen kiristys (kg)	Max. liikematka (m)	Korkeus (mm)	Paino (kg)
ER-3A	3	3	305	1,4

